




THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES

DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE UPON PRODUCTION.

UNLESS OTHERWISE SPECIFIED: -DIMENSIONS ARE IN INCHES -REF: APPROXIMATE DIMENSIONS, NO TOLERANCES API -FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER

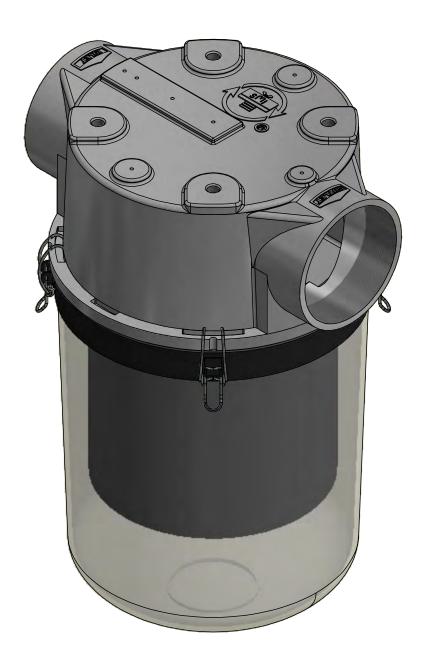

	ELEMENT SPECS							
		PART NUMBER		235P				
		MATERIAL		Polyester				
		FLOW RATE	570 CFM		968 m³/hr			
			SURFACE AREA	8.3 ft ²		0.8 m ²		
			I.D.	4.75"		121mm		
			O.D.	7.88"		200mm		
		HEIGHT	9.63"		244mm			
	MODEL #: ST-235P-401C	MATE	RIAL: CAST ALUMINUM/PL					
	MODEL NUMBER: ST-235P-401C					_		
θE	DESCRIPTION: ST-235P-401C, CLEAR BUCKET							
APPLY R	PROJECT:	DRA	WN BY: CRW	Α	APPROVED BY: M.C.			REV:
		DATE	E: 3/28/2016	D.	DATE: 3/28/2016			