

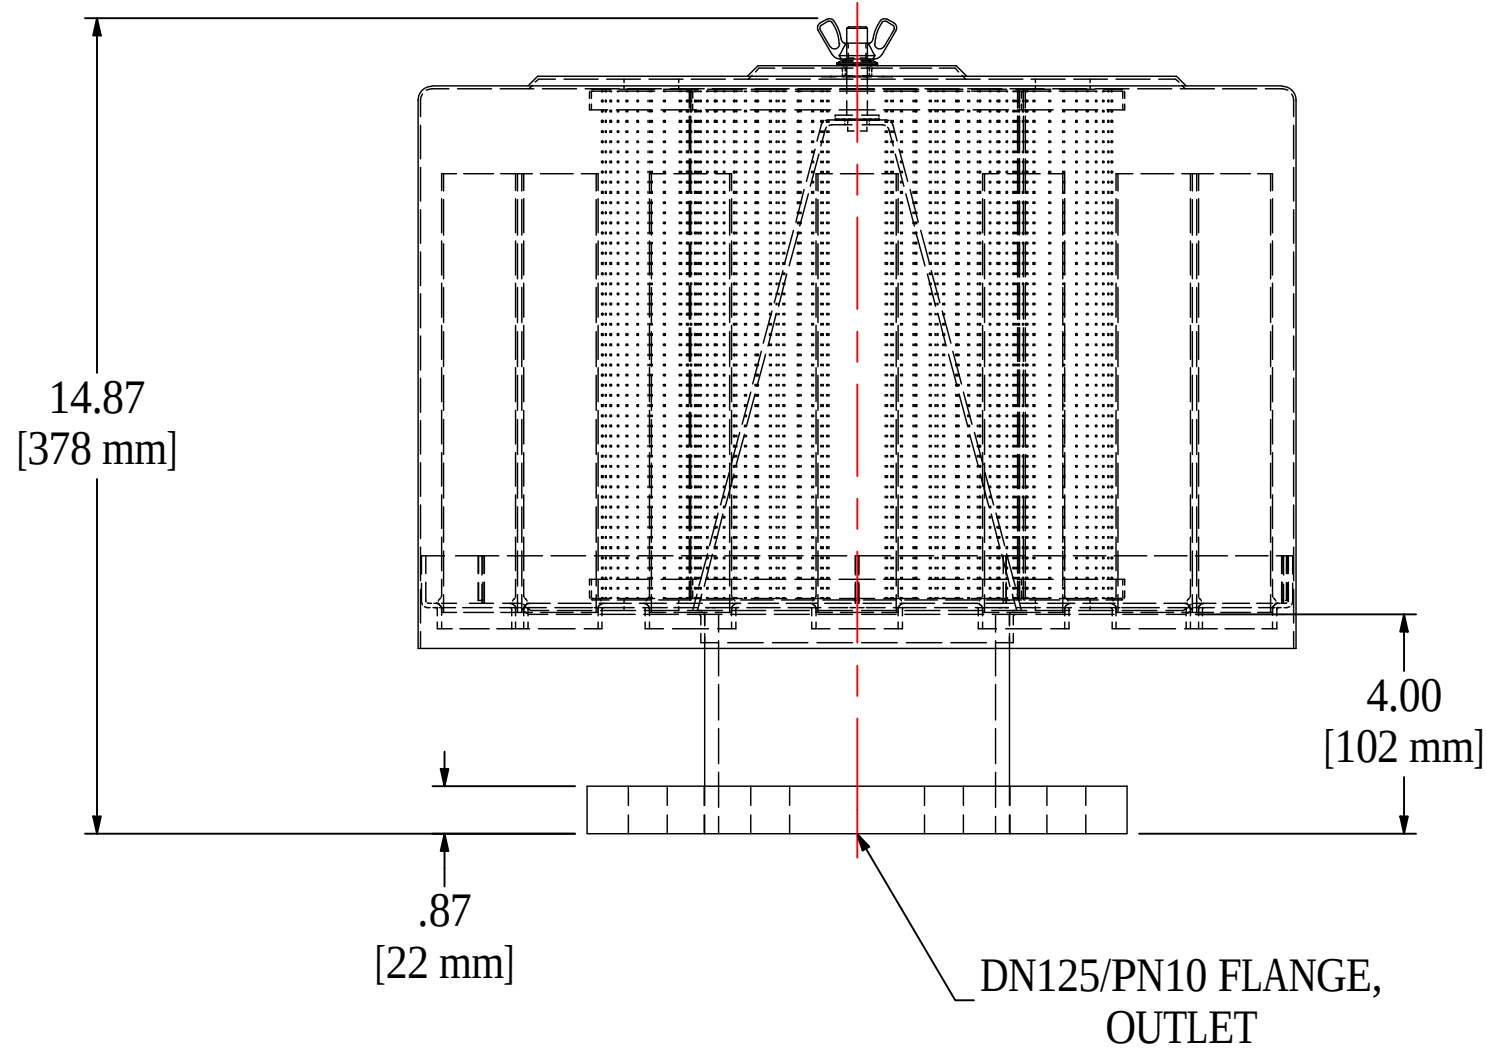


REV	DESCRIPTION	ECN #	CHG BY	DATE	APP'D
A	UPDATED TO CURRENT LAYOUT		WEB	10/11/19	EZR

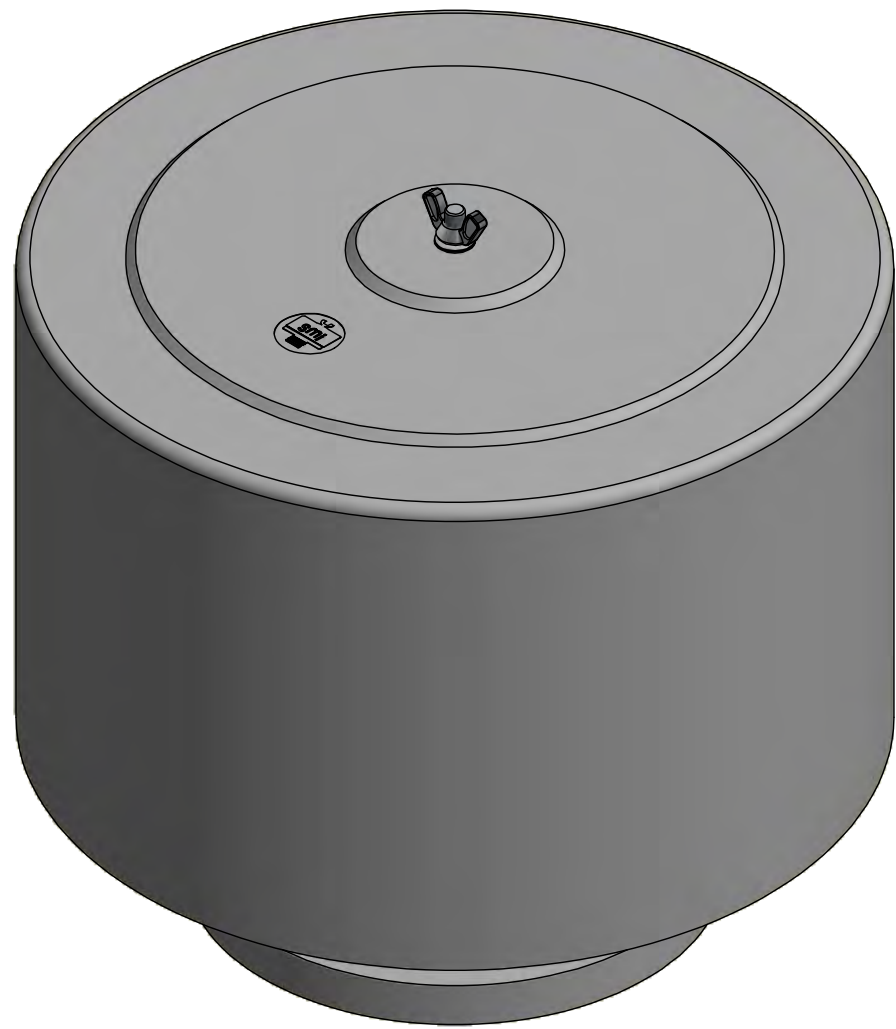

ELEMENT SPECS		
PART NUMBER	245P	
MATERIAL	POLYESTER	
FLOW RATE	880 CFM	1496 m³/hr
SURFACE AREA	14.9 ft²	1.4 m²
I.D.	6.00"	152mm
O.D.	9.75"	248mm
HEIGHT	9.69"	246mm

MODEL #: FS-245P-DN125		MATERIAL: CARBON STEEL		FINISH: GRAY POWDER	
MODEL NUMBER: FS-245P-DN125					SHEET: 1 OF 1
DESCRIPTION: FS-245P-DN125, GRAY					
PROJECT: SD18057		DRAWN BY: EZR DATE: 6/26/2014		APPROVED BY: CRW DATE: 6/26/2014	
				REV: A	

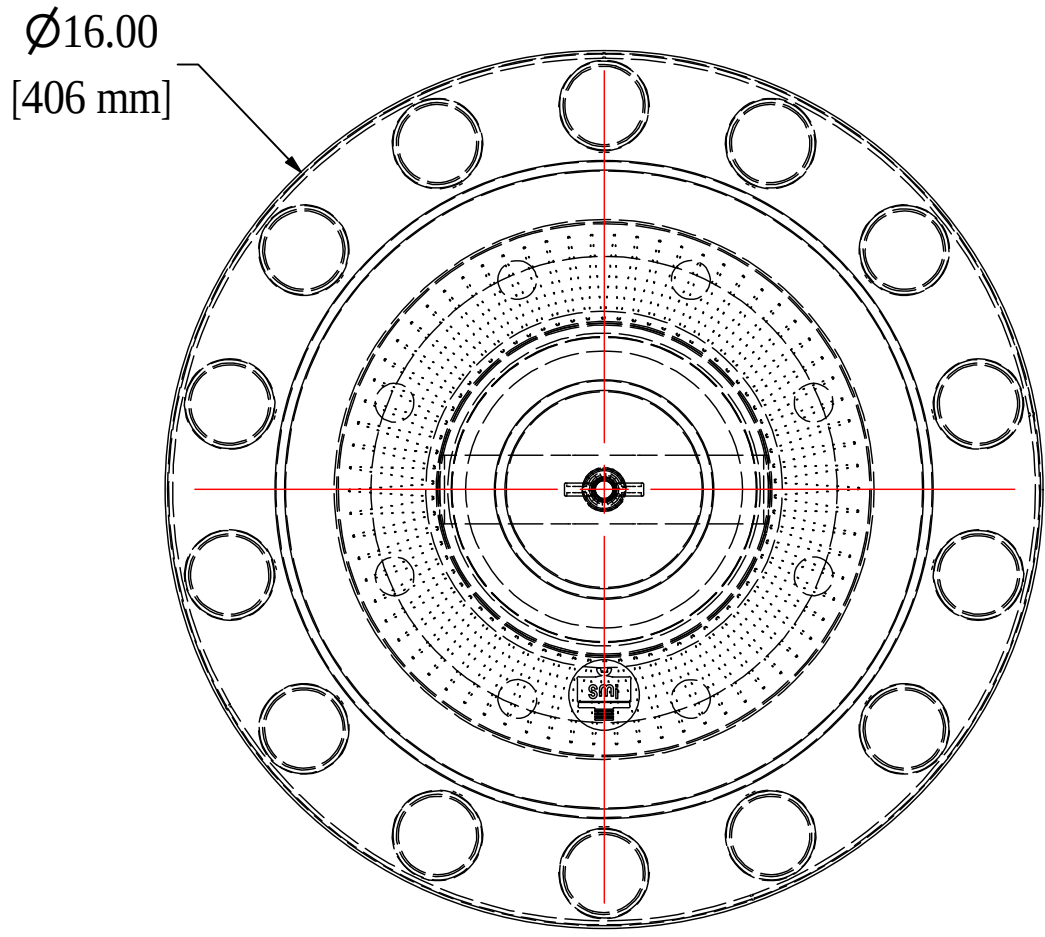

SOLBERG®
Filtration • Separation • Silencing
630.773.1363 • www.solbergmfg.com

THE INFORMATION CONTAINED HEREIN IS CONFIDENTIAL AND THE PROPERTY OF SOLBERG MANUFACTURING INC. AND IT IS FURNISHED TO YOU WITH THE EXPRESS UNDERSTANDING THAT IT WILL NOT BE REPRODUCED, COPIED IN ANY MANNER, LOANED OR OTHERWISE TRANSFERRED TO OTHERS ENTIRELY OR IN PART, NOR USED FOR ANY PURPOSE OTHER THAN FOR WHICH IT WAS FURNISHED. IT WILL BE RETURNED UPON REQUEST TO SOLBERG MANUFACTURING INC. THE ABOVE RESTRICTION IS IN ADDITION TO, AND DOES NOT IN ANY WAY ALTER, ANY OTHER RESTRICTIONS WHICH MAY APPLY TO THE INFORMATION CONTAINED HEREIN.

TOLERANCES
DIMENSIONS ARE FOR REFERENCE ONLY. ALL DIMENSIONS ARE SUBJECT TO CHANGE UPON PRODUCTION.
UNLESS OTHERWISE SPECIFIED:
-DIMENSIONS ARE IN INCHES
-REF: APPROXIMATE DIMENSIONS, NO TOLERANCES APPLY
-FINISH: BREAK EDGES TO .005-.020 RADIUS/CHAMFER